

INSTRUCTIONS

JAMB LINER – DOUBLE HUNG INSTALLATION


DEAR CUSTOMER

THANK YOU FOR YOUR ORDER OF OUR DOUBLE HUNG WINDOWS. FOR TROUBLE FREE OPERATION PLEASE ENSURE THE FOLLOWING INSTRUCTIONS ARE FOLLOWED:-

INSTALLATION:

- a) Do not remove brace until all the following installation steps are completed.
- b) Always ensure styles are plumb and straight and that the sill is level.
- c) Fixing should be at 150mm from the head and sill and at every 600mm intervals on each style. To avoid any twist in frame and to ensure the styles remain plumb it is necessary to solid pack at each fixing point to stud.

Note: Frames must be nailed through stud into frame.

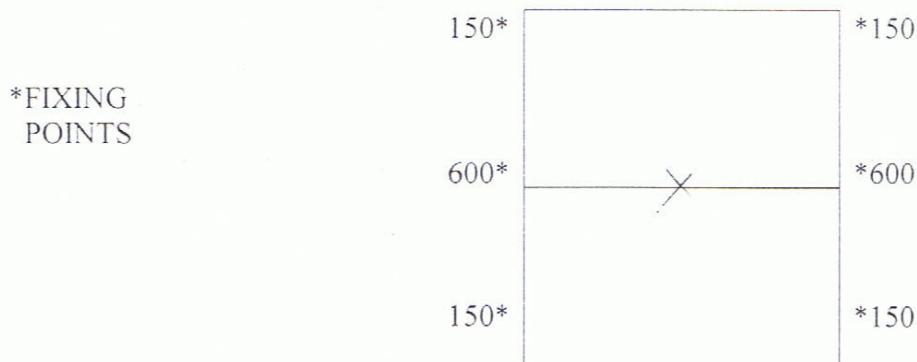

+Caution: Do not puncture Jamb Liner with nail.

PLEASE NOTE: All windows have been tested and passed our quality inspection before leaving the factory.

It is advisable to spray with silicon spray after painting.

No claims will be recognised unless all of the above steps have been completed. Any claim must be lodged within 5 days of delivery.

ASPECT WINDOW CO.
5 PARK DRIVE
DANDENONG VIC 3175
PH: 9768 3944 FAX: 9768 3861